


20A SCHOTTKY BARRIER RECTIFIERS

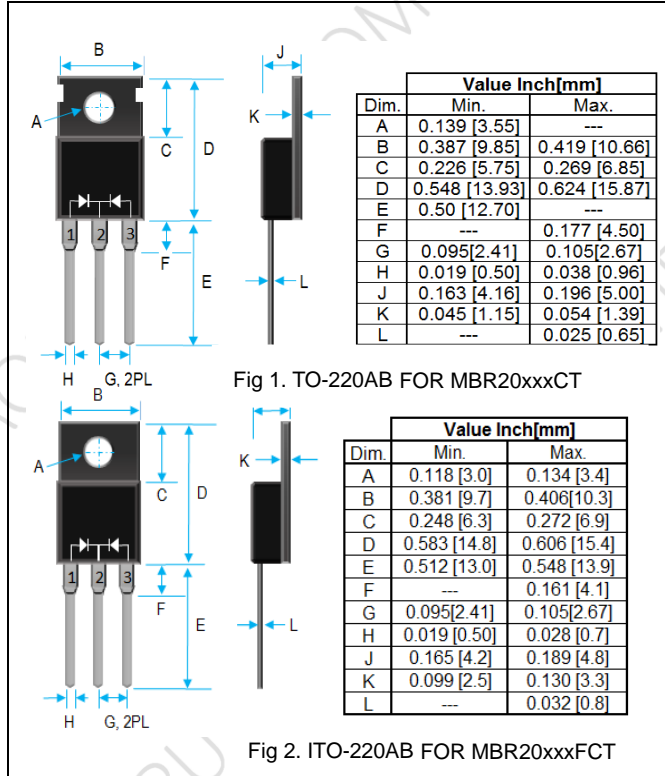

PRODUCT FEATURES

1. FLAMMABILITY CLASSIFICATION 94V-0
2. EXTREMELY LOW V_f
3. LOW STORED CHARGE
4. MAJORITY CARRIER CONDUCTION
5. LOW POWER LOSS/HIGH EFFICIENCY
6. CASE: TRANSFER MOLDED
TO-220AB FOR MBR20xxxCT
ITO-220AB FOR MBR20xxxFCT
7. DIMENSIONS IN INCHES AND (MILLIMETERS)
8. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208
9. WEIGHT: 2.15 GRAMS (TO-220AB)
1.55GRAMS (ITO-220AB)
10. RoHS COMPLIANT AND HALOGEN FREE

ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED) AND ELECTRICAL CHARACTERISTICS

RATING	SYMBOL	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, SEE FIG.1	I_o	20 PER DEVICE (10 PER LEG) A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	150 A
TYPICAL THERMAL RESISTANCE	$R_{\theta jC}$	2.2 (4.0 FOR $\geq 100\text{V}$ DEVICE) $^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	T_{STG}	- 65 TO +175 $^\circ\text{C}$
MAXIMUM REVERSE CURRENT AT 25 $^\circ\text{C}$ PER LEG (NOTE 1)	I_R	0.05 (0.01mA FOR $\geq 100\text{V}$ DEVICE) mA
MAXIMUM REVERSE CURRENT AT 125 $^\circ\text{C}$ PER LEG (NOTE 1)	I_R	10 mA
ISOLATION VOLTAGE FROM TERMINAL TO HEATSINK T=1MIN		1500 (FOR MBR20xxxFCT ONLY) VAC

PART NUMBER	MAX RECURRENT PK REVERSE VOLTAGE/DC BLOCKING V_{RRM}/V_R (V)	MAX V_{RMS} (V)	OPERATING TEMPERATURE RANGE ($^\circ\text{C}$)	MAXIMUM FORWARD VOLTAGE V_f @ $I_f=10\text{A}$ @25 $^\circ\text{C}$	MAXIMUM FORWARD VOLTAGE V_f @ $I_f=10\text{A}$ @125 $^\circ\text{C}$	MAXIMUM FORWARD VOLTAGE V_f @ $I_f=20\text{A}$ @25 $^\circ\text{C}$	MAXIMUM FORWARD VOLTAGE V_f @ $I_f=20\text{A}$ @125 $^\circ\text{C}$
MBR2040(F)CT	40	28	- 55 TO +150	0.65V	0.57V	0.84V	0.72V
MBR2045(F)CT	45	31.5	- 55 TO +150	0.65V	0.57V	0.84V	0.72V
MBR2060(F)CT	60	42	- 55 TO +150	0.75V	0.70V	0.85V	0.75V
MBR20100(F)CT	100	70	- 55 TO +150	0.85V	0.75V	0.95V	0.85V
MBR20150(F)CT	150	105	- 55 TO +175	0.92V	0.80V	1.00V	0.90V
MBR20200(F)CT	200	140	- 55 TO +175	0.92V	0.80V	1.00V	0.90V

NOTE : 1. PULSE TEST: 300 μs PULSE WIDTH, 1% DUTY CYCLE.

2. CURRENT RATING IS BASED ON SINGLE PHASE, 1/2 WAVE, 60HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD DERATING CURVE

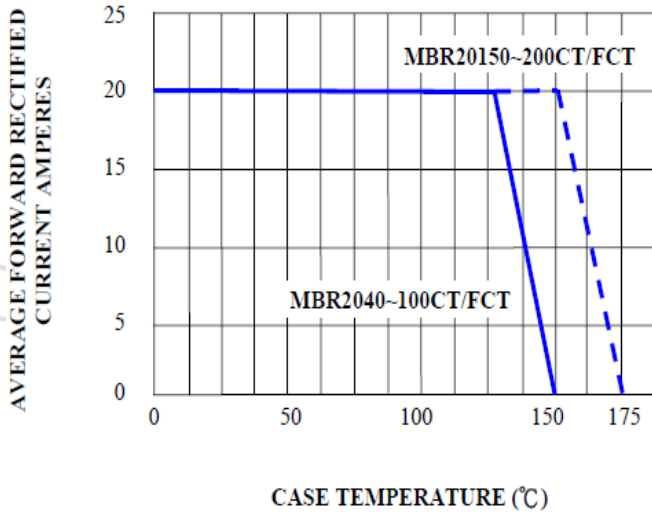


FIG. 2 - PEAK FORWARD SURGE CURRENT

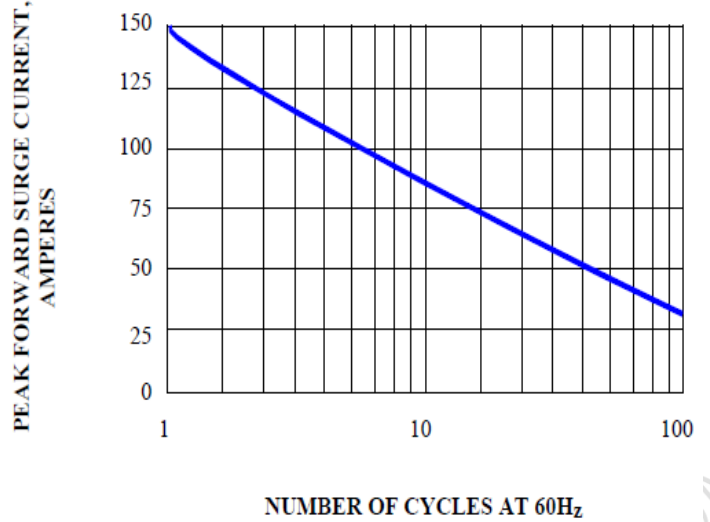


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

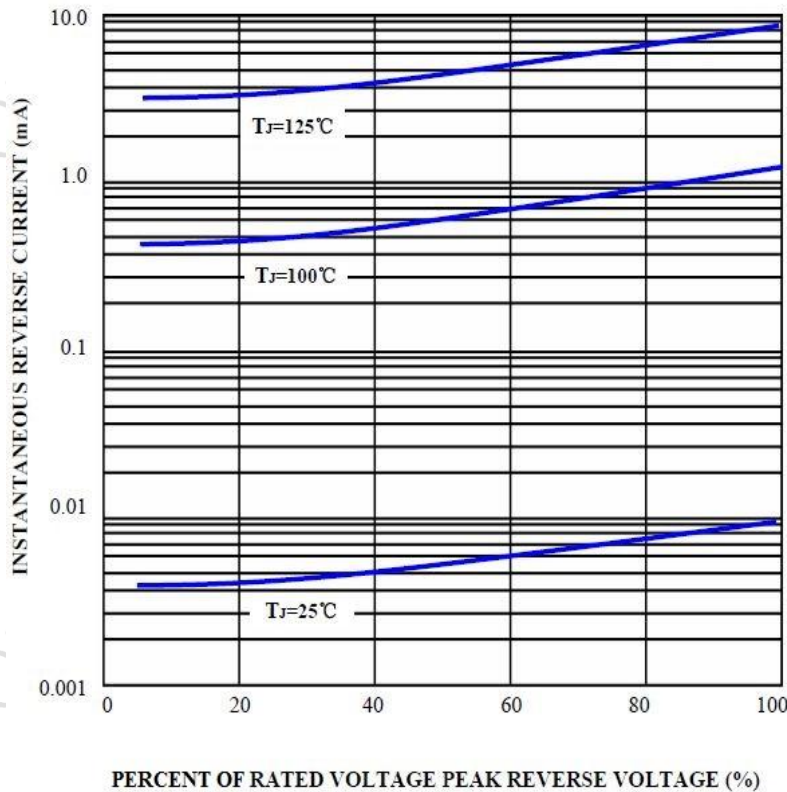


FIG. 4 - TYPICAL FORWARD CHARACTERISTIC PER LEG

