

30A SCHOTTKY BARRIER RECTIFIERS

		Value Inch[mm]	
Dim.		Min.	Max.
A		0.139 [3.55]	---
B		0.387 [9.85]	0.419 [10.66]
C		0.226 [5.75]	0.269 [6.85]
D		0.548 [13.93]	0.624 [15.87]
E		0.50 [12.70]	---
F		---	0.177 [4.50]
G		0.095[2.41]	0.105[2.67]
H		0.019 [0.50]	0.038 [0.96]
J		0.163 [4.16]	0.196 [5.00]
K		0.045 [1.15]	0.054 [1.39]
L		---	0.025 [0.65]

		Value Inch[mm]	
Dim.		Min.	Max.
A		0.118 [3.0]	0.134 [3.4]
B		0.381 [9.7]	0.406[10.3]
C		0.248 [6.3]	0.272 [6.9]
D		0.583 [14.8]	0.606 [15.4]
E		0.512 [13.0]	0.548 [13.9]
F		---	0.161 [4.1]
G		0.095[2.41]	0.105[2.67]
H		0.019 [0.50]	0.028 [0.7]
J		0.165 [4.2]	0.189 [4.8]
K		0.099 [2.5]	0.130 [3.3]
L		---	0.032 [0.8]

PRODUCT FEATURES

1. FLAMMABILITY CLASSIFICATION 94V-0
2. EXTREMELY LOW V_f
3. LOW STORED CHARGE
4. MAJORITY CARRIER CONDUCTION
5. LOW POWER LOSS/HIGH EFFICIENCY
6. CASE: TRANSFER MOLDED
TO-220AB FOR MBR30xxxCT
ITO-220AB FOR MBR30xxxFCT
7. DIMENSIONS IN INCHES AND (MILLIMETERS)
8. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208
9. WEIGHT: 2.15 GRAMS (TO-220AB)
1.55GRAMS (ITO-220AB)
10. RoHS COMPLIANT AND HALOGEN FREE

ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED) AND ELECTRICAL CHARACTERISTICS

RATING	SYMBOL	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, SEE FIG.1	I_o	30 PER DEVICE (15 PER LEG) A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	230 A
TYPICAL THERMAL RESISTANCE	$R_{\theta JC}$	2.2 (4.0 FOR $\geq 100\text{V}$ DEVICE) $^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	T_{STG}	- 65 TO +175 $^\circ\text{C}$
MAXIMUM REVERSE CURRENT AT 25°C PER LEG (NOTE 1)	I_R	0.05 (0.01mA FOR $\geq 100\text{V}$ DEVICE) mA
MAXIMUM REVERSE CURRENT AT 125°C PER LEG (NOTE 1)	I_R	15 mA
ISOLATION VOLTAGE FROM TERMINAL TO HEATSINK $T=1\text{MIN}$		1500 (FOR MBR30xxxFCT ONLY) VAC

PART NUMBER	MAX RECURRENT PK REVERSE VOLTAGE/DC BLOCKING V_{RRM}/V_R (V)	MAX V_{RMS} (V)	OPERATING TEMPERATURE RANGE ($^\circ\text{C}$)	MAXIMUM FORWARD VOLTAGE V_f @ $I_F=15\text{A}$ @ 25°C	MAXIMUM FORWARD VOLTAGE V_f @ $I_F=15\text{A}$ @ 125°C	MAXIMUM FORWARD VOLTAGE V_f @ $I_F=30\text{A}$ @ 25°C	MAXIMUM FORWARD VOLTAGE V_f @ $I_F=30\text{A}$ @ 125°C
MBR3040(F)CT	40	28	- 55 TO +150	0.65V	0.57V	0.84V	0.72V
MBR3045(F)CT	45	31.5	- 55 TO +150	0.65V	0.57V	0.84V	0.72V
MBR3060(F)CT	60	42	- 55 TO +150	0.75V	0.70V	0.85V	0.75V
MBR30100(F)CT	100	70	- 55 TO +150	0.85V	0.75V	0.95V	0.85V
MBR30150(F)CT	150	105	- 55 TO +175	0.95V	0.85V	1.00V	0.95V
MBR30200(F)CT	200	140	- 55 TO +175	0.95V	0.85V	1.00V	0.95V

NOTE : 1. PULSE TEST: 300 μs PULSE WIDTH, 1% DUTY CYCLE.

2. CURRENT RATING IS BASED ON SINGLE PHASE, 1/2 WAVE, 60HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.



RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD DERATING CURVE

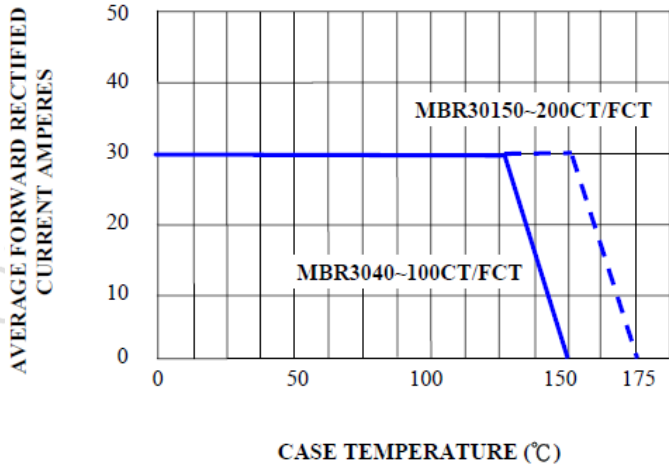


FIG. 2 - PEAK FORWARD SURGE CURRENT

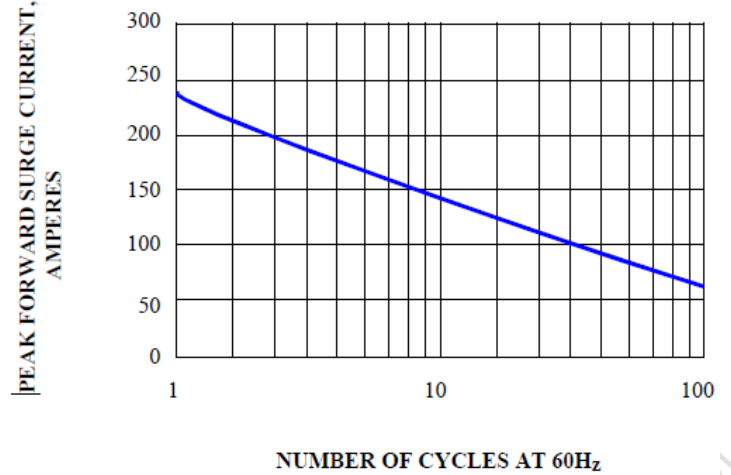


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

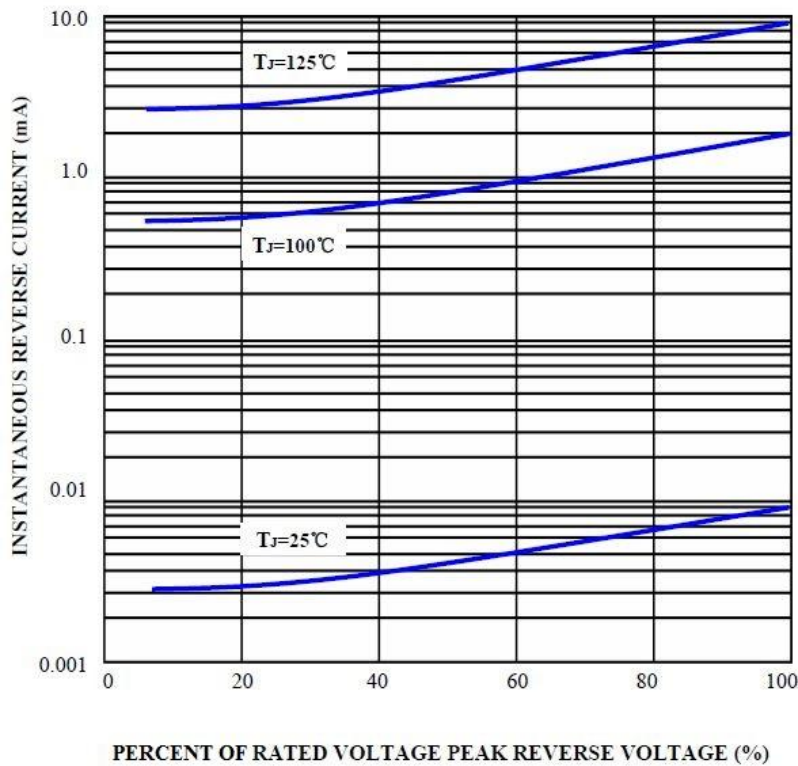


FIG. 4 - TYPICAL FORWARD CHARACTERISTIC PER LEG

