

## 10A SCHOTTKY BARRIER RECTIFIERS

		Value Inch[mm]	
Dim.		Min.	Max.
A		0.139 [3.55]	---
B		0.387 [9.85]	0.419 [10.66]
C		0.226 [5.75]	0.269 [6.85]
D		0.548 [13.93]	0.624 [15.87]
E		0.50 [12.70]	---
F		---	0.177 [4.50]
G		0.095[2.41]	0.105[2.67]
H		0.019 [0.50]	0.038 [0.96]
J		0.163 [4.16]	0.196 [5.00]
K		0.045 [1.15]	0.054 [1.39]
L		---	0.025 [0.65]

		Value Inch[mm]	
Dim.		Min.	Max.
A		0.118 [3.0]	0.134 [3.4]
B		0.381 [9.7]	0.406[10.3]
C		0.248 [6.3]	0.272 [6.9]
D		0.583 [14.8]	0.606 [15.4]
E		0.512 [13.0]	0.548 [13.9]
F		---	0.161 [4.1]
G		0.095[2.41]	0.105[2.67]
H		0.019 [0.50]	0.028 [0.7]
J		0.165 [4.2]	0.189 [4.8]
K		0.099 [2.5]	0.130 [3.3]
L		---	0.032 [0.8]

### PRODUCT FEATURES

1. FLAMMABILITY CLASSIFICATION 94V-0
2. EXTREMELY LOW  $V_F$
3. LOW STORED CHARGE
4. MAJORITY CARRIER CONDUCTION
5. LOW POWER LOSS/HIGH EFFICIENCY
6. CASE: TRANSFER MOLDED  
TO-220AB FOR SB10xxCT  
ITO-220AB FOR SB10xxFCT
7. DIMENSIONS IN INCHES AND (MILLIMETERS)
8. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208
9. WEIGHT: 2.15 GRAMS (TO-220AB)  
1.55GRAMS (ITO-220AB)
10. RoHS COMPLIANT AND HALOGEN FREE

## ELECTRICAL CHARACTERISTICS

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED ) AND ELECTRICAL CHARACTERISTICS

RATING	SYMBOL	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, SEE FIG.1	$I_o$	10 PER DEVICE (5 PER LEG) A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	$I_{FSM}$	125 A
TYPICAL THERMAL RESISTANCE	$R_{\theta jC}$	2.2 (4.0 FOR $\geq 60\text{V}$ DEVICE) $^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	$T_{STG}$	- 65 TO +175 $^\circ\text{C}$
OPERATING TEMPERATURE RANGE	$T_J$	- 55 TO +125 $^\circ\text{C}$
MAXIMUM REVERSE CURRENT AT $25^\circ\text{C}$ PER LEG (NOTE 1)	$I_R$	0.5 mA
MAXIMUM REVERSE CURRENT AT $125^\circ\text{C}$ PER LEG (NOTE 1)	$I_R$	20 mA
ISOLATION VOLTAGE FROM TERMINAL TO HEATSINK $T=1\text{MIN}$		1500 (FOR SB10xxFCT ONLY) VAC

PART NUMBER	MAX RECURRENT PK REVERSE VOLTAGE/DC BLOCKING $V_{RRM}/V_R$ (V)	MAX $V_{RMS}$ (V)	MAXIMUM FORWARD VOLTAGE $V_F$ @ $I_F=5\text{A}$	
			@ $25^\circ\text{C}$	@ $125^\circ\text{C}$
SB1040(F)CT	40	28	0.55V	0.50V
SB1045(F)CT	45	31.5	0.55V	0.50V
SB1060(F)CT	60	42	0.65V	0.60V
SB1065(F)CT	65	45.5	0.65V	0.60V

NOTE : 1. PULSE TEST: 300 $\mu\text{s}$  PULSE WIDTH, 1% DUTY CYCLE.

2. CURRENT RATING IS BASED ON SINGLE PHASE, 1/2 WAVE, 60HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.



## RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD DERATING CURVE

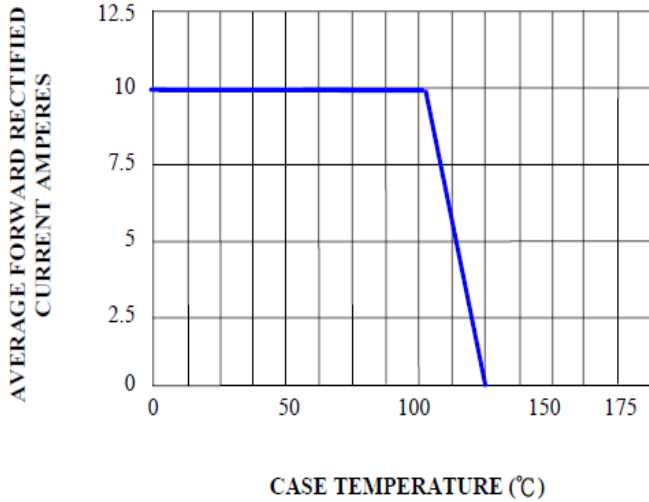


FIG. 2 - PEAK FORWARD SURGE CURRENT

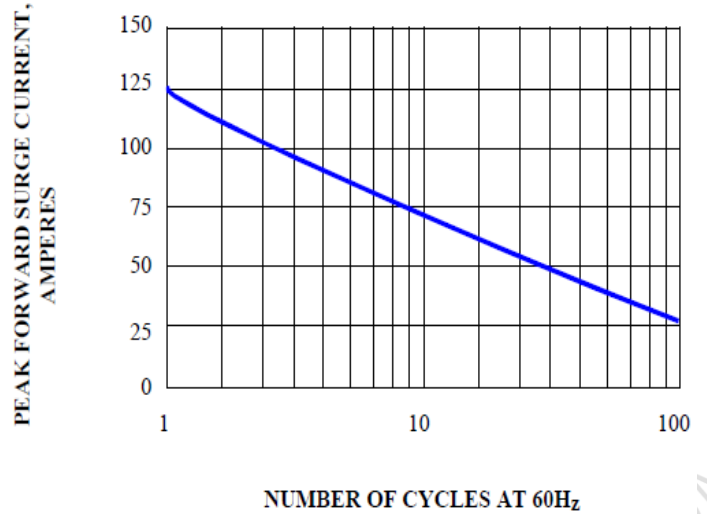


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

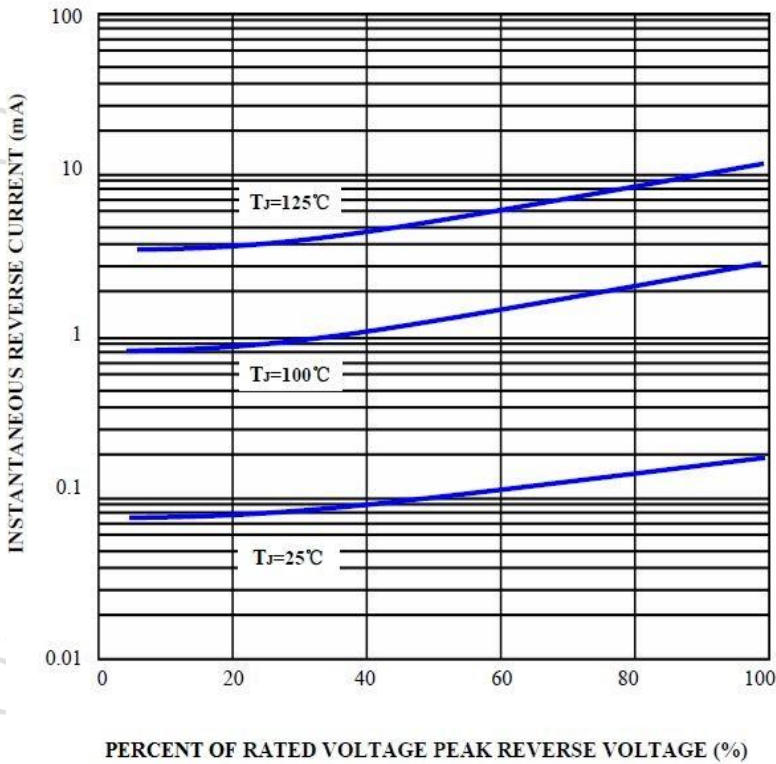


FIG. 4 - TYPICAL FORWARD CHARACTERISTIC PER LEG

