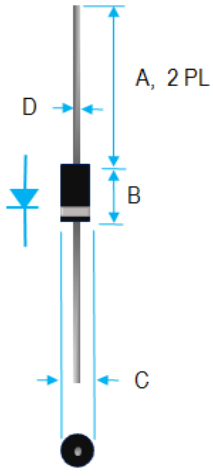


## 2A SCHOTTKY BARRIER RECTIFIERS

 <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="3">Value Inch[mm]</th> </tr> <tr> <th>Dim.</th> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.000[25.40]</td> <td>---</td> </tr> <tr> <td>B</td> <td>0.166[4.22]</td> <td>0.205[5.21]</td> </tr> <tr> <td>C</td> <td>0.080[2.03]</td> <td>0.107[2.72]</td> </tr> <tr> <td>D</td> <td>0.028[0.71]</td> <td>0.034[0.86]</td> </tr> </tbody> </table>	Value Inch[mm]			Dim.	Min.	Max.	A	1.000[25.40]	---	B	0.166[4.22]	0.205[5.21]	C	0.080[2.03]	0.107[2.72]	D	0.028[0.71]	0.034[0.86]	<h3>PRODUCT FEATURES</h3> <ol style="list-style-type: none"> <li>1. FLAMMABILITY CLASSIFICATION 94V-0</li> <li>2. EXTREMELY LOW <math>V_F</math></li> <li>3. LOW STORED CHARGE</li> <li>4. MAJORITY CARRIER CONDUCTION</li> <li>5. LOW POWER LOSS/HIGH EFFICIENCY</li> <li>6. CASE: TRANSFER MOLDED, DO-41</li> <li>7. DIMENSIONS IN INCHES AND (MILLIMETERS)</li> <li>8. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208</li> <li>9. WEIGHT: 0.34 GRAMS</li> <li>10. RoHS COMPLIANT</li> </ol>
Value Inch[mm]																			
Dim.	Min.	Max.																	
A	1.000[25.40]	---																	
B	0.166[4.22]	0.205[5.21]																	
C	0.080[2.03]	0.107[2.72]																	
D	0.028[0.71]	0.034[0.86]																	

## ELECTRICAL CHARACTERISTICS

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED) AND ELECTRICAL CHARACTERISTICS

RATING	SYMBOL		UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, SEE FIG.1	$I_o$	2.0	A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	$I_{FSM}$	50	A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JA}$	40	$^\circ\text{C}/\text{W}$
STORAGE TEMPERATURE RANGE	$T_{STG}$	- 55 TO +150	$^\circ\text{C}$
OPERATING TEMPERATURE RANGE	$T_{OP}$	- 55 TO +150	$^\circ\text{C}$
MAXIMUM REVERSE CURRENT AT $25^\circ\text{C}$	$I_R$	0.5	mA
MAXIMUM REVERSE CURRENT AT $100^\circ\text{C}$	$I_R$	20	mA

PART NUMBER	MAX RECURRENT PK REVERSE VOLTAGE/DC BLOCKING $V_{RRM}/V_R$ (V)	MAX $V_{RMS}$ (V)	MAXIMUM FORWARD VOLTAGE @ $I_o$ DC $V_F$ (V)	TYPICAL JUNCTION CAPACITANCE $C_J$ (pF)
SR240	40	28	0.55	90
SR260	60	42	0.70	110
SR2100	100	70	0.85	110

NOTE : 1. MEASURED AT 1MHz WITH APPLIED REVERSE VOLTAGE OF 4V.  
 2. BOTH LEADS ATTACHED TO HEAT SINK 20x20x1T (mm) COPPER PLATE AT LEAD LENGTH 5mm.  
 3. CURRENT RATING IS BASED ON SINGLE PHASE, 1/2 WAVE, 60HZ, RESISTIVE, OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

## RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD CURRENT DERATING CURVE

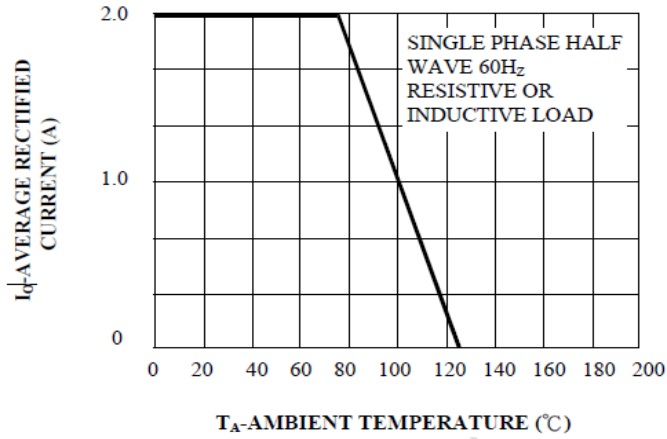


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

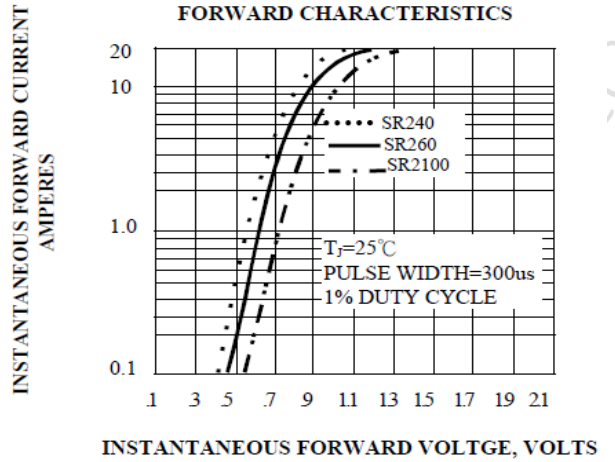


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

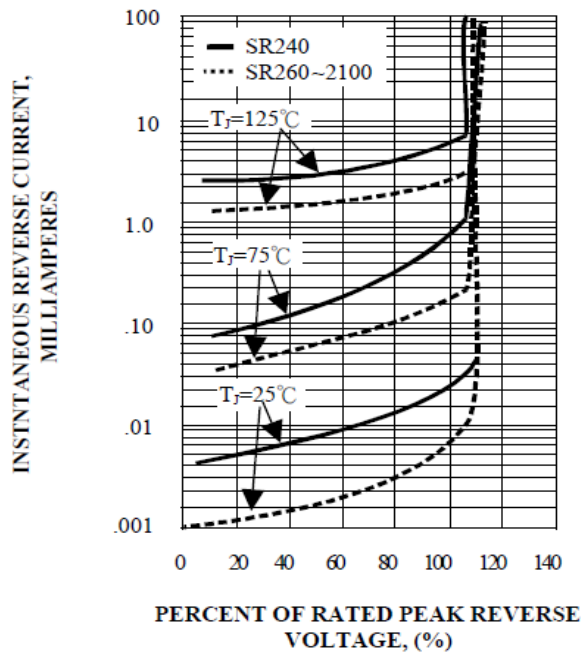


FIG. 4 - MAXIMUM NON-REPETITIVE SURGE CURRENT

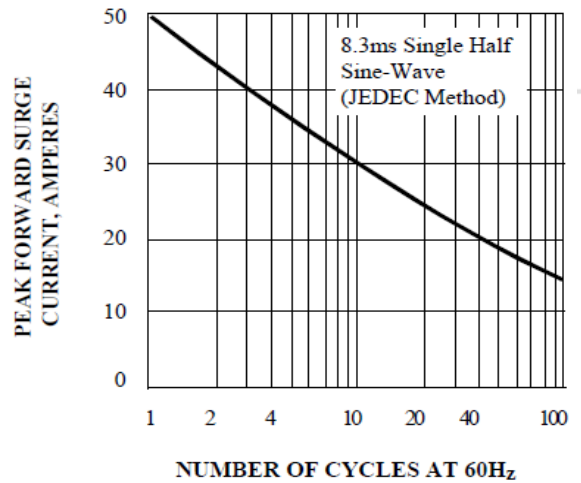


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

